




Mole-Richardson Co.

TYPE 3051

**2,000 WATT MOLEQUARTZ®
2K BABY MOLEPOLE
"ZIP®" SOFTLITE**

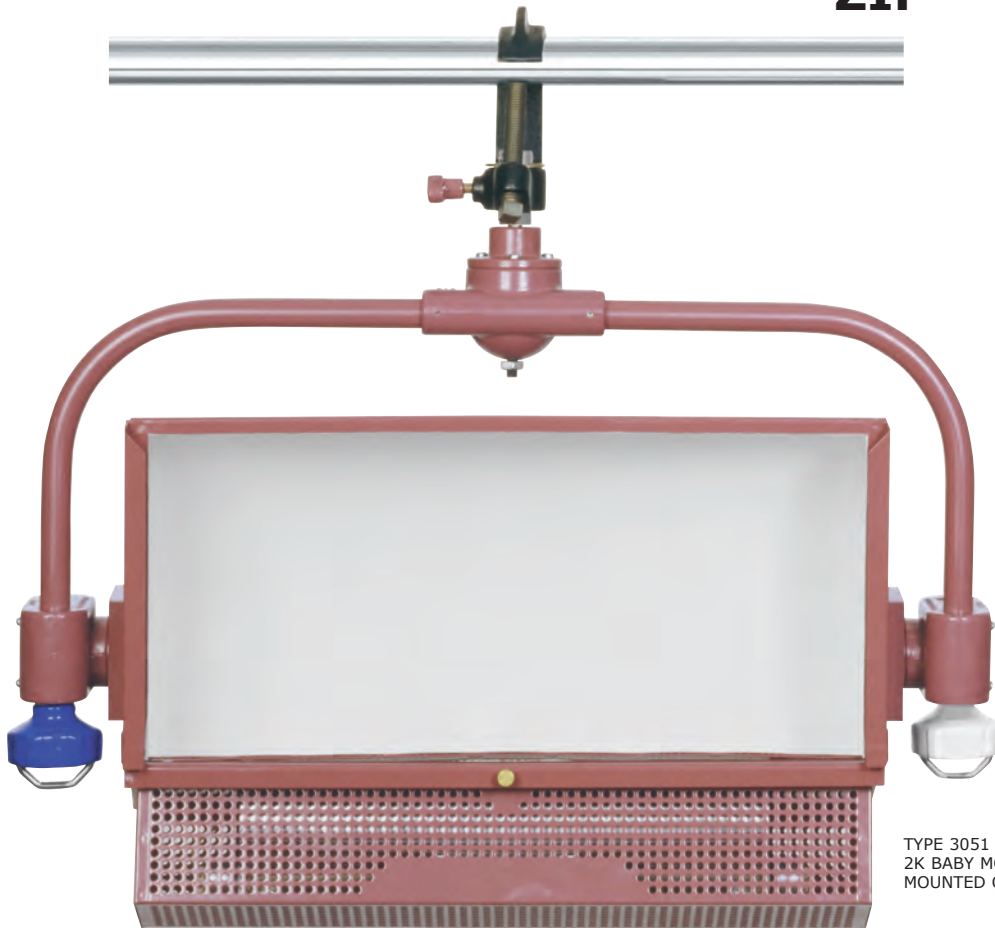

TYPE 3051 MOLEQUARTZ®
2K BABY MOLEPOLE "ZIP" SOFTLITE
MOUNTED ON TYPE 1201 C-CLAMP

7

13


FEATURES

The 2K Baby Molepole "Zip" Softlite is designed for pole operation, pan and tilt with fixture hanging on pipe. This Softlite will fit in tight locations and small sets where space is limited. Now adjustable from the floor with our Molepole. Equipped with safety screen.



Mole-Richardson Co.

TYPE 3051 **CE** 2,000 WATT 2K BABY MOLEPOLE "ZIP®" SOFTLITE

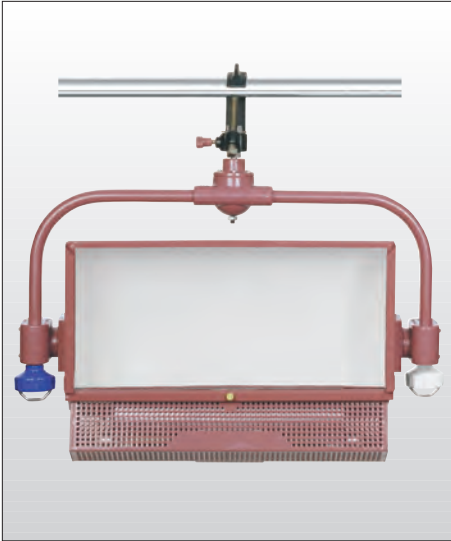

GLOBE TABLE

Base—recessed single contact. Burn horizontal $\pm 4^\circ$. T-3 bulb. $4\frac{1}{16}$ " M.O.L.

Watts	Ordering Code	Color Temp.*K	Finish	Volts	Life Hours	Amps
1000	FCM	3200	Clear	120	400	8.3
1000	FHM	3200	Frost	120	400	8.3
800	EME	3200	Clear	240	250	3.3
800	EMF	3200	Frost	240	250	3.3
750	EJG	3200	Clear	120	400	6.3
750	EMD	3200	Frost	120	400	6.3
500	FDG	3200	Clear	120	400	4.2
500	FDN	3200	Frost	120	400	4.2
500	FCL	3000	Clear	120	2000	4.2
500	FCZ	3000	Frost	120	2000	4.2
300	EHM	2950	Clear	120	2000	2.5
300	EHZ	2950	Frost	120	2000	2.5

Globes are not included in price of lamp.
See price list for complete details.

SPECIFICATIONS

HEAD: Type 3051, 2,000 watts.

RATING: 120/240 volts, A.C. or D.C., 16.7 amps max., 2,000 watts max.

SOCKETS: Compressible single contact. (2 per globe.)

CABLE: Attached 3ft., Type SO, 3-conductor #14 AWG.

(Specify type of plug when ordering.)

SWITCH: Not applicable.

CONSTRUCTION: Solid and perforated sheet steel.

YOKE: Tubular aluminum and aluminum castings into which the horizontal and vertical movement systems are integrated. $\frac{13}{16}$ " dia. spud attaches to Accessory Type 1201 C-Clamp.

REFLECTING SURFACES: Molebrite® specular aluminum.

Reflecting Hood: Special diffusing coating.

FINISH: Maroon Powder Coat Enamel.

SIZE: 8" x $17\frac{1}{2}$ " aperture.

C-CLAMP to CENTER: $15\frac{3}{4}$ ".

HEAD WEIGHT: $13\frac{3}{4}$ lbs. (w/cable).

ACCESSORIES

- 1201 C-Clamp
Accessory 1201 C-Clamp needed to hang 3051
- 2595 Egg Crate
- 25930 Diffuser Frame ($18\frac{1}{4}$ " x $8\frac{1}{4}$ ")
- 25979S Single Moledura Scrim ($18\frac{1}{4}$ " x $8\frac{1}{4}$ ")
- 25979D Double Moledura Scrim ($18\frac{1}{4}$ " x $8\frac{1}{4}$ ")
- 25950 2-Leaf Light Shield
- 25912 Snoot (6")
- 25913 Snoot (18")
- 42080 Molepole (3 ft.)
- 42081 Molepole (6 ft.)
- 42082 Molepole (12 ft.)
- 81861 Safety Cable
- 259101 Replacement Reflector Inserts for Hood Reflector/No Repainting Required.



Type 1201
C-Clamp



Type 2595
Egg Crate



Type 259101
Replacement Reflector



Type 42080
3' Molepole

PERFORMANCE DATA

Using EJG-Q1000T3/4CL, 1,000 Watt, 120 volt, 3200° K quartz globe.

Distance Feet	Light Intensity F.C.	Lighted Area Dimension*—Feet	
		Width	Height
4	540	5.8	5.3
8	150	11.6	10.3
12	70	17.4	15.5
16	40	23.2	20.7
20	25	29.0	25.8

*Light tapers smoothly at edge of field. Dimensions listed define flat area boundaries at which the intensities are approximately 50% of tabulated intensities at beam center.

